

LIFTING INNOVATION

## COMBi-SL

The 3 wheel sideloader forklift designed for the safe, space saving and productive handling of long and bulky loads.











REF.	DESCRIPTION	C9000 SL	C10,000 SL	C12,000 SL
1a	Standard Lift Height	159"		
1b	Free Lift Height	0"		
2	Height Mast Closed	118″		
3	Max. (Mast raised)	204³⁄₄″		
4	Overall Length	803/4"	803/4"	881/2"
5	Mast Travel	51"	51"	59"
6	Ground Clearance Under Mast	12"		
7	Ground Clearance to Center of Wheelbase	13"		
8	Height Over Cab (Without work lights)	106"		
9	Width	153½"		
10	Outside Spread of Fork Arms	53"		
11	Track Front	1281⁄4″		
12	Frame Opening	55″		
13	Load Center Distance	231/2"		
14	Overhang Front	10³/₄″		
15	Wheelbase	65"	65"	73″
16	Overhang Back	4³/4″		
17	Length From Face of Fork	331/2"		
18	Approach Angle	45°		
19	Ramp Angle	18°		
20	Departure Angle	45°		
21	Forward Tilt	3°		
22	Backward Tilt	5°		
23	Minimum Outisde Radius	102″		
24	Platform Height (Optional 750mm)	331/2"		
25	Platform Length	47"	47"	55"
Α	Capacity	9000 lbs	10,000 lbs	12,000 lbs
В	Unladen Weight	21,650 lbs	21,825 lbs	22,490 lbs
C	Maximum Ground Speed	12 mph		
D	Gradeability	15%		
Е	Deutz TCD 3.6 ltr / 4.3 ltr GM LPG	74 HP / 96 HP		
F	Electrics	12 Volt		
G	Fork Section 2" x 8" x	47"	47"	55"
Н	27 x 10 - 12 Front Tire	OD 27" / Width 10"		
- 1	355 / 65 - 15 Rear Tire	OD 31" / Width 111/2"		
J	Standard Color	Green & Gray		
K	Suspension Seat	KAB Model 116		


## Features Include:

- Rubber Mounted Half-Open Cabin
- Multi-Directional Operation
- 3 Wheel Hydrostatic Drive
- Load Sensing Steering
- 4 Way Lever Positioning of Wheels
- Hydraulic Oil Cooler

## Distributed by:



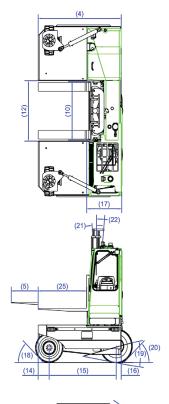



303 Concord Street Greensboro North Carolina 27406 Toll free: 1-877 COMBI 56 Tel: 336-378-8884 info@combilift.com

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countri